


GREENHOUSE KIT (KGRN)

This kit will spray 2 areas 10 foot long and 4 foot wide. The misters have a 2 foot radius and should be placed 2 feet apart. The kit includes trellis hangers so the tubing can be suspended on trellis wire above the propagation tables.

Kit Includes:

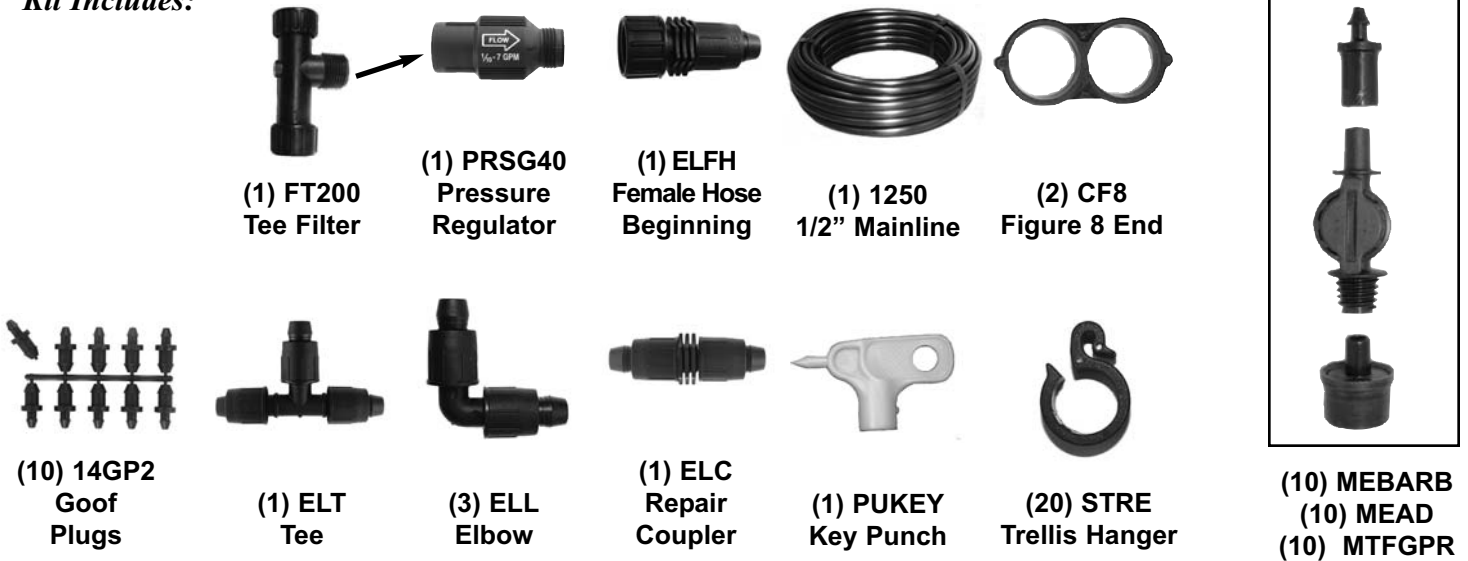

Instructions:

1. At the faucet, timer or end of the hose, attach the Tee filter (**FT200**) and then the pressure regulator (**PRSG40**).
2. The Easy Loc Female Hose Beginning (**ELFH**) connects to the 1/2" mainline tubing (see enclosed Easy Loc fitting instructions.)
3. Connect the **ELFH** to the pressure regulator.
4. Set up trellis wire over the center of the irrigation area at the desired height and tension.
5. Unroll the mainline and allow it to relax before attaching it to the trellis hangers. Use the Easy Loc Tee (**ELT**) to split the mainline over the tables.
6. Punch a hole in the mainline with the punch (**PUKEY**) and insert the misting assembly so it is oriented to spray onto the bed or table. The distance between the misters should be 2-3 feet.
7. Turn the water on and flush the lines. Close the mainlines with the Figure 8 Ends (**CF8**).



- Consider a timer for a completely automated system. The DIG Greenhouse timer (TGALGH34) Page 7 is the most versatile.
- Hose Extension (HPEX) Page 36 • Hose Adapters Page 43 • Hose Y (HYVBR) Page 36 • Additional Trellis Hangers (STRE) Page 35